

Camshelving®




- Easy and Quick to Clean
- Unquestionably Strong, Durable and Stable
- Easy to Adjust and Configure
- Rust-Free

CAMBRO
TRUSTED FOR GENERATIONS™



www.cambro.com



Easy and Quick to Clean

Camshelving is the revolutionary shelving system that makes storage easy in any environment, wet or dry.

Camshelving is the most hygienic shelving system in the market and the easiest to clean and adjust.

Smooth polypropylene shelves simply wipe clean and each component is dishwasher safe.

Unquestionably Strong, Durable and Stable

Posts and traverses, the weight bearing components, are made of a steel core with a thick polypropylene exterior. This makes Camshelving strong, durable and easy to clean.

Easy to Adjust and Configure

The Camshelving system is based on four easy to use, easy to assemble parts. Each part is available in a variety of sizes to allow the flexibility to custom build shelving in any configuration or to fit in any size area.

Rust-Free

Camshelving is backed with a lifetime limited warranty against rust and corrosion for traverses and stationary posts.

It is ideal for walk-in refrigerators and freezers because it with-stands temperatures as cold as -38°C. It's weldless and rustproof, so Camshelving can be used in wet areas.


2

Easy and Quick to Clean

For a Sanitary Storage Area



- Shelf plates are easy to remove and run through the dishwasher.
- Smooth polypropylene surface quickly wipes clean.
- Spills clean quickly and easily, reducing the risk of cross-contamination.
- Camshelving is weldless, so liquids and dirt cannot get inside crevices.
- Camguard® is a silver-ion technology that inhibits the growth of mold, fungus and bacteria.
- All shelf plates are embedded with Camguard antimicrobial so it will not scrape off, wash off or wear out.
- Camguard works continuously to suppress the growth of microbes between cleanings.

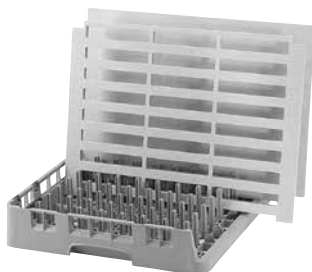

Shelf plates can be easily removed, washed individually or placed in an open end Camrack® OETR314 and washed in a commercial dishwasher.

Easy to Assemble and Adjust


Build Any Configuration And Fit Any Size Area

- Create a space efficient layout for any area.
- Assembles in minutes, requiring only the use of a mallet.
- Shelves can be adjusted in 100 mm increments without disassembling the entire unit.
- Two units can be connected together with shelves at alternating heights for maximum storage flexibility.
- Corner Connectors attach units to create a 90° angle or U shape.

POST HEIGHT	DOVETAIL INCREMENT	NUMBER OF POSITIONS PER POST
Stationary		
1400 mm	100 mm	12
1500 mm	100 mm	13
1600 mm	100 mm	14
1700 mm	100 mm	15
1800 mm	100 mm	16
Mobile		
990 mm	100 mm	7
1490 mm	100 mm	12
1590 mm	100 mm	13
1690 mm	100 mm	14
1790 mm	100 mm	15

EASY TO ASSEMBLE!

Traverse slides easily down onto dovetail.

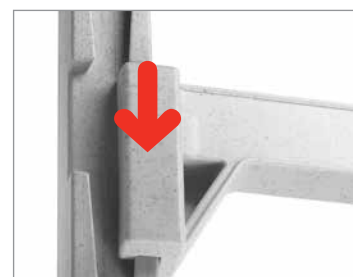

Unquestionably Strong and Durable

- Posts and traverses, the weight bearing components, are constructed with a steel core and encapsulated by a thick polypropylene outer layer.
 - Inner steel core ensures that Camshelving is strong, durable and stable.
 - Thick, polypropylene outer layer will not chip, break or corrode.
 - Post connectors provide exceptional cross stabilization.
- * Corner Connectors are recommended for use on traverses 1200 mm or less.

** Dunnage Stands are used only on the bottom shelf. Recommended for traverses 1400 mm or longer.

❖ Due to the weight bearing capacity of casters, maximum weight load on an entire Mobile Camshelving Unit is 340 Kg.



Weight Bearing Capacity: Stationary Unit

TRAVERSE LENGTH	WEIGHT BEARING CAPACITY PER SHELF	TOTAL WEIGHT FOR UNIT WITH 4 SHELVES
Single Unit		
600 mm to 1200 mm	200 Kg	800 Kg
1300 mm to 1700 mm	150 Kg	600 Kg
Corner Unit*		
600 mm to 1200 mm	180 Kg	720 Kg
Dunnage Stand**		
1300 mm to 1700 mm	454 Kg	—

Weight Bearing Capacity: Mobile Unit

PRODUCT	TOTAL WEIGHT ON MOBILE UNIT
Mobile Units ❖	340 Kg

Rust Free

For Use in Any Area, Wet or Dry

- Camshelving is weldless with no exposed metal, so it remains rust free.
- Safe to -38°C, making Camshelving the ideal shelving system for freezers, walk-ins or any wet or humid environment.
- Not even salt water or sea air will corrode Camshelving.



Dry Storage Room



Cold Storage Room

CAMSHELIVING COMPONENTS ARE:

Store and Transport Food Safely

ISO 9001
Product Safety

Dishwasher Safe
Except mobile parts

HACCP

Fit for Food Products

Cadmium-Free

Recyclable Polypropylene

ANTIMICROBIAL SHELF PLATES

Camshelving shelf plates contain Camguard® antimicrobial, a silver-ion technology that inhibits the growth of mold, fungus and bacteria that may cause odors, stains and product degradation. Camguard fights the growth of such microbes between regular cleanings. Camguard alone will not protect against disease causing bacteria.

Components

Camshelving® is a modular system that allows the flexibility to assemble shelving to fit any size area. The key components, including posts, post connectors, traverses and shelf plates, are available in a variety of sizes. They can be easily configured to custom build shelving

to maximize storage space. Unique design elements such as shared posts and corner connectors simplify assembly and increase storage capacity.

Traverses



Traverses have a steel core with a polypropylene exterior to provide strength and durability.

Traverses connect to the post by sliding on to the dovetail on the post.

Two traverses are needed to build one shelf, and they define the length of the unit.


Shelf Plates

Shelf Plates are made of polypropylene. Dishwasher safe.

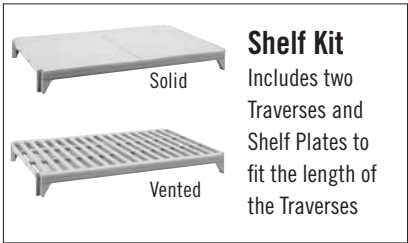

Shelf Kit

Includes two Traverses and Shelf Plates to fit the length of the Traverses

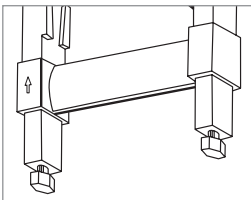

Posts For Stationary Unit

Posts have a steel core with a polypropylene exterior to provide strength and durability.

Posts define the height of the shelving unit and are measured with the leveling foot fully engaged.

Post for Stationary Unit




Stationary Unit

Post Connectors

Post connectors hold two posts together and define the width of the unit.

They are made of polypropylene and provide excellent cross stabilization.



Post Kit

Includes two Posts and a set of one top and one bottom Post Connector



Posts for Mobile Camshelving

Mobile Camshelving posts must be used to build mobile Camshelving units.



Post for Mobile Unit

Mobile Unit

Casters

Available in standard for dry storage or premium for freezers, cold, or wet applications.




Maximize Space Utilization

Camshelving® is available in starter and add-on units for ease of ordering and assembly.


Starter Units

- Available in stationary or mobile units.
- Starter units ship complete with two post kits, traverses and shelf plates to build an entire unit.

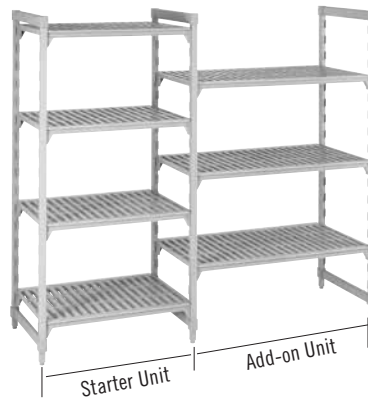

Add-On Units

- Add-On units ship complete with one post kit, traverses and shelf plates to attach to an adjoining unit.
- The traverses on both the first and second unit share the middle post.
- No add-on clips or S-hooks required.
- There is no loss of weight bearing capacity when built in a straight line.

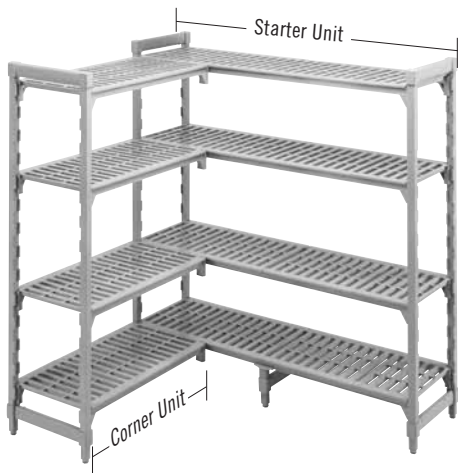

Corner Unit & U Shape Units

- Corner connectors can be used to build corner units and U Shape units.
- Traverses snap onto corner connectors just like they snap onto the dovetails of the posts.

Corner Connector Set


- Attaches a basic unit to a second unit at a 90° angle or to form a U shape.
- A set of corner connectors are needed for each shelf.



* Corner connectors are recommended for use on traverses equal to or shorter than 1200 mm, and covered by U.S. Patent D498,664S.

Dunnage Stand


- Increases weight bearing capacity to 454 Kg on the bottom shelf.
- Recommended for units 1400 mm or longer.



* Dunnage stands are covered by U.S. Patent US 6,981,454B2.

Fence System

- Prevents stored items from falling off shelving units.
- Ideal for mobile shelving.

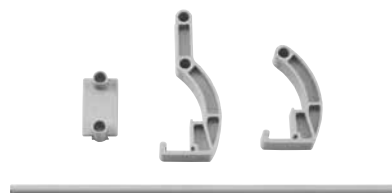

Mobile Units

- Mobile Camshelving units are built by using posts for mobile carts and inserting casters.
- Mobile units are not designed to serve as transport carts.
- Casters sold separately.



Mobile unit shown with optional fencing.

Seismic Foot

- Bolts a post to the floor for a more stable base.
- Screws not included.



Wall Fastener

- Fastens a unit to a wall as a safety precaution.
- Screws not included.



Identification Tag

- Easily clips onto traverses to identify stored items.
- Made of PVC.
- Includes 12 HACCP labels.



Donut Bumper


- Protects mobile Camshelving.
- 90 mm Bumper.



Camshelving® Footprint Dimensions


- The following charts are provided to assist in developing a footprint for your storage area.
- They can also be used to help determine your actual shelf space.
- Traverse measurements are based on outside, or overall unit length.
- This includes the posts.
- The overall length varies slightly when using a basic unit, add-on unit, intermediate unit or corner unit.
- These variations are outlined below.

Basic Unit

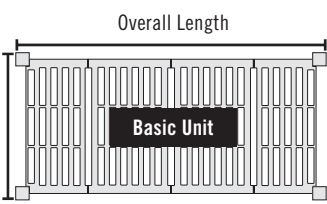


Add-On Unit

Shared Post between Basic Unit and Add-On Unit.

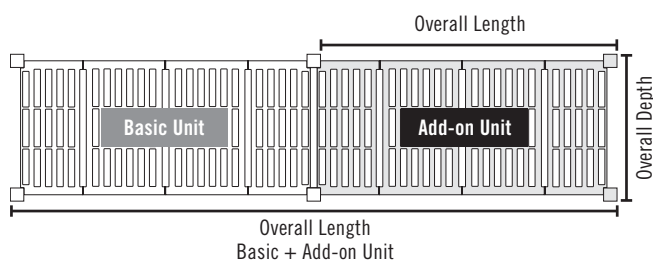


Corner Unit

Using one set of Corner Connectors per shelf.

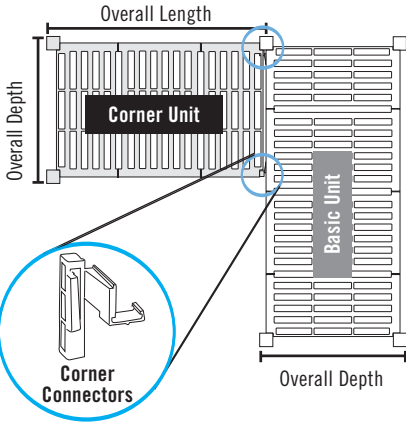

Intermediate Unit

Using two sets of Corner Connectors on each side of a shelf.

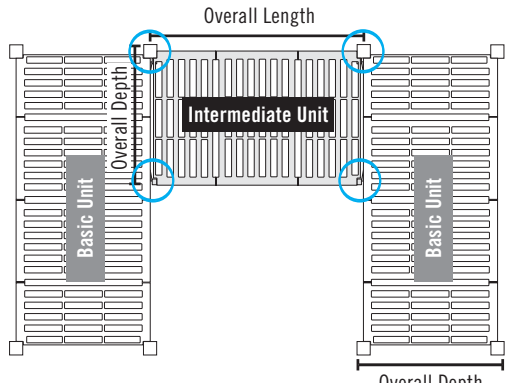

UNIT	BASIC UNIT OVERALL LENGTH	ADD-ON UNIT OVERALL LENGTH	BASIC + ADD-ON UNIT OVERALL LENGTH
600 mm	680 mm	635 mm	1315 mm
700 mm	780 mm	735 mm	1515 mm
800 mm	880 mm	835 mm	1715 mm
900 mm	980 mm	935 mm	1915 mm
1000 mm	1080 mm	1035 mm	2115 mm
1100 mm	1180 mm	1135 mm	2315 mm
1200 mm	1280 mm	1235 mm	2515 mm
1300 mm	1380 mm	1335 mm	2715 mm
1400 mm	1480 mm	1435 mm	2915 mm
1500 mm	1580 mm	1535 mm	3115 mm
1600 mm	1680 mm	1635 mm	3315 mm
1700 mm	1780 mm	1735 mm	3515 mm

UNIT	CORNER UNIT OVERALL LENGTH	INTERMEDIATE UNIT OVERALL LENGTH
600 mm	655 mm	630 mm
700 mm	755 mm	730 mm
800 mm	855 mm	830 mm
900 mm	955 mm	930 mm
1000 mm	1055 mm	1030 mm
1100 mm	1155 mm	1130 mm
1200 mm	1255 mm	1230 mm

Corner Connectors are recommended for use on traverses 1200 mm or less.





Shelf Spacing

Dovetails are spaced every 100 mm



POST HEIGHT	DOVETAIL INCREMENT	NUMBER OF POSITIONS PER POST
Stationary		
1400 mm	100 mm	12
1500 mm	100 mm	13
1600 mm	100 mm	14
1700 mm	100 mm	15
1800 mm	100 mm	16
Mobile		
990 mm	100 mm	8
1490 mm	100 mm	13
1590 mm	100 mm	14
1690 mm	100 mm	15
1790 mm	100 mm	16

Stationary Post Kits





					
HEIGHT	DEPTH	300 mm	400 mm	500 mm	600 mm
1400 mm	CODE	MSPK30140	MSPK40140	MSPK50140	MSPK60140
1500 mm	CODE	MSPK30150	MSPK40150	MSPK50150	MSPK60150
1600 mm	CODE	MSPK30160	MSPK40160	MSPK50160	MSPK60160
1700 mm	CODE	MSPK30170	MSPK40170	MSPK50170	MSPK60170
1800 mm	CODE	MSPK30180	MSPK40180	MSPK50180	MSPK60180

Case Pack: 1 Color: Speckled White (490).

7






www.cambro.com

Dunnage Stands







					
HEIGHT	DEPTH	300 mm	400 mm	500 mm	600 mm
165 mm	CODE	MSDS30	MSDS40	MSDS50	MSDS60







Case Pack: 1 Color: Speckled White (490).

Accessories

						
		Seismic Foot	Wall Fastener	Corner Connectors	Id Tag 152 mm	Id Tag 76 mm
	CODE	CSEQ3	CSWF	MSCC	CSID	CSID3
	DESCRIPTION	Seismic Foot	Wall Fastener	90° Left & Right	152 mm ID Tag	76 mm ID Tag
	COLOR	Silver	Silver	Speckled White (490)	White/Clear	White/Clear
	SIZE: L x W x H	102 x 83 x 59 mm	238 x 48 x 73 mm	—	25 x 152 mm	25 x 76 mm
	CASE PACK	4 each	4 each	1 set of 2 parts	12 each	12 each







Solid Shelf Kits







							
DEPTH	LENGTH	600 mm	700 mm	800 mm	900 mm	1000 mm	1100 mm
300 mm	CODE	MS3060SK	MS3070SK	MS3080SK	MS3090SK	MS30100SK	MS30110SK
400 mm	CODE	MS4060SK	MS4070SK	MS4080SK	MS4090SK	MS40100SK	MS40110SK
500 mm	CODE	MS5060SK	MS5070SK	MS5080SK	MS5090SK	MS50100SK	MS50110SK
600 mm	CODE	MS6060SK	MS6070SK	MS6080SK	MS6090SK	MS60100SK	MS60110SK

							
DEPTH	LENGTH	1200 mm	1300 mm	1400 mm	1500 mm	1600 mm	1700 mm
300 mm	CODE	MS30120SK	MS30130SK	MS30140SK	MS30150SK	MS30160SK	MS30170SK
400 mm	CODE	MS40120SK	MS40130SK	MS40140SK	MS40150SK	MS40160SK	MS40170SK
500 mm	CODE	MS50120SK	MS50130SK	MS50140SK	MS50150SK	MS50160SK	MS50170SK
600 mm	CODE	MS60120SK	MS60130SK	MS60140SK	MS60150SK	MS60160SK	MS60170SK

Case Pack: 1 Color: Speckled White (490).

Vented Shelf Kits






							
DEPTH	LENGTH	600 mm	700 mm	800 mm	900 mm	1000 mm	1100 mm
300 mm	CODE	MS3060VK	MS3070VK	MS3080VK	MS3090VK	MS30100VK	MS30110VK
400 mm	CODE	MS4060VK	MS4070VK	MS4080VK	MS4090VK	MS40100VK	MS40110VK
500 mm	CODE	MS5060VK	MS5070VK	MS5080VK	MS5090VK	MS50100VK	MS50110VK
600 mm	CODE	MS6060VK	MS6070VK	MS6080VK	MS6090VK	MS60100VK	MS60110VK

							
DEPTH	LENGTH	1200 mm	1300 mm	1400 mm	1500 mm	1600 mm	1700 mm
300 mm	CODE	MS30120VK	MS30130VK	MS30140VK	MS30150VK	MS30160VK	MS30170VK
400 mm	CODE	MS40120VK	MS40130VK	MS40140VK	MS40150VK	MS40160VK	MS40170VK
500 mm	CODE	MS50120VK	MS50130VK	MS50140VK	MS50150VK	MS50160VK	MS50170VK
600 mm	CODE	MS60120VK	MS60130VK	MS60140VK	MS60150VK	MS60160VK	MS60170VK

Case Pack: 1 Color: Speckled White (490).

Vented Starter Units - 400mm Deep

Each Starter Unit Includes 2 Post Kits And 4 Shelf Kits.






DEPTH 400 mm		 36" (915 mm)	 42" (1070 mm)	 48" (1220 mm)	 54" (1380 mm)	 60" (1530 mm)
HEIGHT	LENGTH	900 mm	1000 mm	1100 mm	1300 mm	1500 mm
1700 mm	CODE	MSU44917PKG	MSU441017PKG	MSU441117PKG	MSU441317PKG	MSU441517PKG
1800 mm	CODE	MSU44918PKG	MSU441018PKG	MSU441118PKG	MSU441318PKG	MSU441518PKG

Case Pack: 6

Color: Speckled White (490).

Vented Add-On Units - 400mm Deep

Each Add-On Unit Includes 1 Post Kit And 4 Shelf Kits.






DEPTH 400 mm		 34.25" (870 mm)	 40.25" (1025 mm)	 46.25" (1175 mm)	 52.25" (1330 mm)	 58.25" (1480 mm)
HEIGHT	LENGTH	900 mm	1000 mm	1100 mm	1300 mm	1500 mm
1700 mm	CODE	MSA44917PKG	MSA441017PKG	MSA441117PKG	MSA441317PKG	MSA441517PKG
1800 mm	CODE	MSA44918PKG	MSA441018PKG	MSA441118PKG	MSA441318PKG	MSA441518PKG

Case Pack: 5

Color: Speckled White (490).

Vented Starter Units - 500mm Deep

Each Starter Unit Includes 2 Post Kits And 4 Shelf Kits.






DEPTH 500 mm		 36" (915 mm)	 42" (1070 mm)	 48" (1220 mm)	 54" (1380 mm)	 60" (1530 mm)
HEIGHT	LENGTH	900 mm	1000 mm	1100 mm	1300 mm	1500 mm
1700 mm	CODE	MSU45917PKG	MSU451017PKG	MSU451117PKG	MSU451317PKG	MSU451517PKG
1800 mm	CODE	MSU45918PKG	MSU451018PKG	MSU451118PKG	MSU451318PKG	MSU451518PKG

Case Pack: 6

Color: Speckled White (490).

Vented Add-On Units - 500mm Deep

Each Add-On Unit Includes 1 Post Kit And 4 Shelf Kits.

DEPTH 500 mm		 34.25" (870 mm)	 40.25" (1025 mm)	 46.25" (1175 mm)	 52.25" (1330 mm)	 58.25" (1480 mm)
HEIGHT	LENGTH	900 mm	1000 mm	1100 mm	1300 mm	1500 mm
1700 mm	CODE	MSA45917PKG	MSA451017PKG	MSA451117PKG	MSA451317PKG	MSA451517PKG
1800 mm	CODE	MSA45918PKG	MSA451018PKG	MSA451118PKG	MSA451318PKG	MSA451518PKG






Case Pack: 5

Dimensions provided with line drawings above are actual dimensions.

Color: Speckled White (490).

Vented Starter Units - 600mm Deep






Each Starter Unit Includes 2 Post Kits And 4 Shelf Kits.

DEPTH 600 mm						
HEIGHT	LENGTH	900 mm	1000 mm	1100 mm	1300 mm	1500 mm
1700 mm	CODE	MSU46917PKG	MSU461017PKG	MSU461117PKG	MSU461317PKG	MSU461517PKG
1800 mm	CODE	MSU46918PKG	MSU461018PKG	MSU461118PKG	MSU461318PKG	MSU461518PKG

Case Pack: 6 Color: Speckled White (490).


Vented Add-On Units - 600mm Deep


Each Add-On Unit Includes 1 Post Kit And 4 Shelf Kits.


DEPTH 600 mm						
HEIGHT	LENGTH	900 mm	1000 mm	1100 mm	1300 mm	1500 mm
1700 mm	CODE	MSA46917PKG	MSA461017PKG	MSA461117PKG	MSA461317PKG	MSA461517PKG
1800 mm	CODE	MSA46918PKG	MSA461018PKG	MSA461118PKG	MSA461318PKG	MSA461518PKG

Case Pack: 5 Dimensions provided with line drawings above are actual dimensions Color: Speckled White (490).

Fence System for Camshelving®




FENCE	FITS TRAVERSE	600 mm	700 mm	800 mm	900 mm	1000 mm	1100 mm
 10 cm	CODE	MSFT602	MSFT702	MSFT802	MSFT902	MSFT1002	MSFT1102
	# OF BRACKETS	2	2	2	3	4	4
	# OF RODS	2	2	2	2	2	2
	FITS TRAVERSE	1200 mm	1300 mm	1400 mm	1500 mm	1600 mm	1700 mm
	CODE	MSFT1202	MSFT1302	MSFT1402	MSFT1502	MSFT1602	MSFT1702
	# OF BRACKETS	4	5	5	5	5	5
	# OF RODS	2	2	2	2	2	2

FENCE	FITS TRAVERSE	600 mm	700 mm	800 mm	900 mm	1000 mm	1100 mm
 5 cm	CODE	MSFT601	MSFT701	MSFT801	MSFT901	MSFT1001	MSFT1101
	# OF BRACKETS	2	2	2	3	4	4
	# OF RODS	1	1	1	1	1	1
	FITS TRAVERSE	1200 mm	1300 mm	1400 mm	1500 mm	1600 mm	1700 mm
	CODE	MSFT1201	MSFT1301	MSFT1401	MSFT1501	MSFT1601	MSFT1701
	# OF BRACKETS	4	5	5	5	5	5
	# OF RODS	1	1	1	1	1	1

FENCE	FITS TRAVERSE	300 mm	400 mm	500 mm	600 mm
	CODE	MSFE30	MSFE40	MSFE50	MSFE60
	# OF BRACKETS	2	2	2	2
	# OF RODS	2	2	2	2

Color: Speckled White (490).



Mobile Post Kits & Casters

				
HEIGHT WITH CASTERS	DEPTH	400 mm	500 mm	600 mm
990 mm	CODE	MSPRK4097	MSPRK5097	MSPRK6097
1490 mm	CODE	MSPRK40147	MSPRK50147	MSPRK60147
1590 mm	CODE	MSPRK40157	MSPRK50157	MSPRK60157
1690 mm	CODE	MSPRK40167	MSPRK50167	MSPRK60167
1790 mm	CODE	MSPRK40177	MSPRK50177	MSPRK60177



Case Pack: 1 Color: Speckled White (490). Casters are not included and must be ordered separately.

Mobile Vented Shelving Units

Each Mobile Vented Shelving Unit includes 2 Mobile Post Kits, 4 Vented Shelf Kits and 4 Casters MSCTL.



DEPTH 400 mm			
HEIGHT	LENGTH	1100 mm	1300 mm
1690 mm	CODE	MSUR441116PK	MSUR441316PK
1790 mm	CODE	MSUR441117PK	MSUR441317PK

Case Pack: 8 Color: Speckled White (490).


DEPTH 500 mm			
HEIGHT	LENGTH	1100 mm	1300 mm
1690 mm	CODE	MSUR451116PK	MSUR451316PK
1790 mm	CODE	MSUR451117PK	MSUR451317PK

Case Pack: 8 Color: Speckled White (490).

Caster

DEPTH 600 mm			
HEIGHT	LENGTH	1100 mm	1300 mm
1690 mm	CODE	MSUR461116PK	MSUR461316PK
1790 mm	CODE	MSUR461117PK	MSUR461317PK

Case Pack: 8 Color: Speckled White (490).

		
	DIAMETER	127 mm
1690 mm	CODE	MSCTL

Case Pack: 2

Total Locking Caster (MSCTL)

- Swivel and brake for use on Mobile Carts.
- Has a brake that stops motion and locks the swivel when engaged.

Camshelving® Wall Shelves and Storesafe® Shelf Extenders

Wall Shelves

- Expand storage space in kitchens, above work stations and sinks.
- Features virtually indestructible I-beam supports that hold up to 68 Kg per shelf.
- Durable polypropylene withstands temperatures up to 88°C, and will not rust or corrode.
- Snap fit rail design allows shelves to snap on and off for easy cleaning.
- 5 cm backsplash and marine front edge controls spills and cross contamination.

Shelf Extenders

- Convert empty wall space into a functional storage area.
- Use with or without Camshelving Wall Shelves.
- Peg strips withstand temperatures up to 88°C, and will not rust or corrode.

Wall Shelf Color: Speckled Grey (480).

Extender Peg Strip Color: Black (110).

Wall Shelf Kits are covered by the following U.S. Patents D 508,646S & D 512,867 S.



COMPONENTS



Shelf Extenders ship in one carton and include:

LENGTH	PEG STRIPS	BRACKETS	HOOKS
91 cm	3	2	6
122 cm	3	3	9



CODE	CSWS1436SK	CSWS1448SK	CSWS1436VK	CSWS1448VK
DESCRIPTION	91 cm Wall Shelf, Solid	122 cm Wall Shelf, Solid	91 cm Wall Shelf, Vented	122 cm Wall Shelf, Vented
EXTERIOR DIMENSIONS	91 L x 36 W x 34 H cm	122 L x 36 W x 34 H cm	91 L x 36 W x 34 H cm	122 L x 36 W x 34 H cm
CASE KG. (CUBE M³)	4,6 (0,04)	5,7 (0,05)	4,4 (0,04)	5,3 (0,05)

Case Pack: 1



CODE	CSWS1836SK	CSWS1848SK
DESCRIPTION	91 cm Wall Shelf, Solid	122 cm Wall Shelf, Solid
EXTERIOR DIMENSIONS	91 L x 46 W x 34 H cm	122 L x 46 W x 34 H cm
CASE KG. (CUBE M³)	5,34 (0,044)	6,56 (0,058)

Case Pack: 1

CODE	CSWS36EK	CSWS48EK
DESCRIPTION	91 cm Shelf Extender	122 cm Shelf Extender
EXTERIOR DIMENSIONS	90 L x 5 W x 39 H cm	121 L x 5 W x 39 H cm
CASE KG. (CUBE M³)	2,9 (0,01)	3,9 (0,01)

Case Pack: 1

Divider Bar for Camshelving®

- Creates a custom storage unit that can accommodate a variety of storage products and sizes on a single Camshelving and Camshelving Elements Series unit.
- Angled and straight designs hold food pans and boxes straight or on an angle for more ergonomic reach.
- Divider bars fit on 600 mm wide Camshelving units and hold up to 91 Kg per shelf.
- Divider bars feature a raised bar on the front edge to keep racks and pans from sliding off the front of the unit.

CODE	DESCRIPTION	CASE KG (CUBE M³)
CSDBA	Divider Bar Angled	0,904 (0,003)
CSDBS	Divider Bar Straight	0,904 (0,003)

Case Pack: 4 **Color:** Speckled Grey (480).



Divider bars can accommodate any size food pans from GN 1/1 to GN 1/9.



30,5 cm x 46 cm food boxes with sliding lids can be used with divider bars for hygienic food storage.



Camracks® fit on divider bars to create a warewashing drying and storage station.

Tray Slide Rack For Camshelving®

- Holds six 46 x 66 cm sheet pans.
- Made from Aluminum which is safe for use in coolers and freezers.
- Fits on Camshelving units 600 mm wide and 600 mm in length or longer.



CODE	DIMENSIONS W x L x H	CASE KG (CUBE M³)
CSTSR	52,71 x 59,05 x 51,44 cm	6,82 (0,16)



Case Pack: 1 **Color:** (000).

Camshelving® High Density Storage System

High Density Camshelving maximizes storage capacity by eliminating aisles and utilizing all available space. Ideal for operations with limited space or that need to use their space more effectively. Floor track system provides safe and easy access to stored product. Heavy weight loads roll securely on raised floor track.



*Increases Storage
Capacity up to*
40%

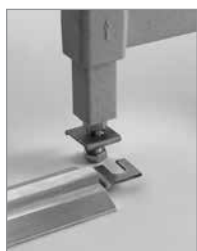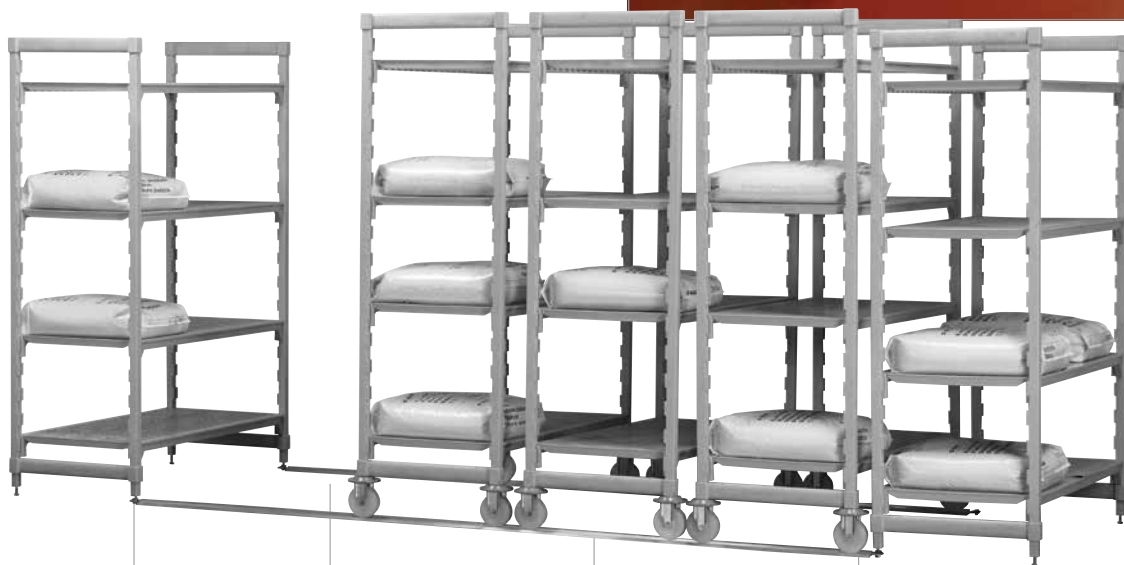

Easy Glide Floor Tracks

The track simply connects to the bottom of the Stationary Camshelving Unit. No bolts or drilling into the floor is required.

Ergonomic Access to Stored Product

Active aisle of 76,2 – 91,44 cm provides easy access to all stored product.

Low profile sloped rail design ensures easy access to product using the active aisle.

Raised Track

Raised track provides a smooth and level surface to easily roll mobile units. It ensures dirt will not get trapped, and is easy to clean.

Mobile Units with heavy weight loads roll smoothly on track.

Roll Easily And Securely


Grooved casters roll easily and securely on raised track.

Can be used on any surface, including tile and choppy floors.



Easy to Clean

- Camshelving is the most hygienic high density storage system available.
- Raised track ensures dirt will not get trapped, and is easy to clean.
- Aluminum track and stainless steel hardware are rust resistant.
- Shelf plates easily wipe clean or can be removed and run through the dishwasher.



CAMGUARD
ANTIMICROBIAL SHELF PLATES

System Components


Easy to Order

- Camshelving stationary units act as the system anchor.
 - Mobile units with exclusive high density casters are available with vented or solid shelves.
 - Mobile units can be ordered in convenient starter units, or custom built using Camshelving mobile post kits, shelf kits and high density casters.*
 - Raised track kits ship with all hardware necessary for installation.
- * Refer to pages 8 and 11 for components to build custom size Camshelving units.

Easy to Configure and Assemble

1. Determine your room size and needs. Multiple track kits can be used together to build the desired length of track.**
2. Choose starter unit size. Existing Camshelving stationary units can be retrofitted and utilized as the system anchors.
3. Choose high density mobile units, either starter units or build custom units.
4. Different width stationary and mobile units may be used in a single run of track.

** It is recommended to use a stationary unit for every 4,6 m of track to further stabilize the system.

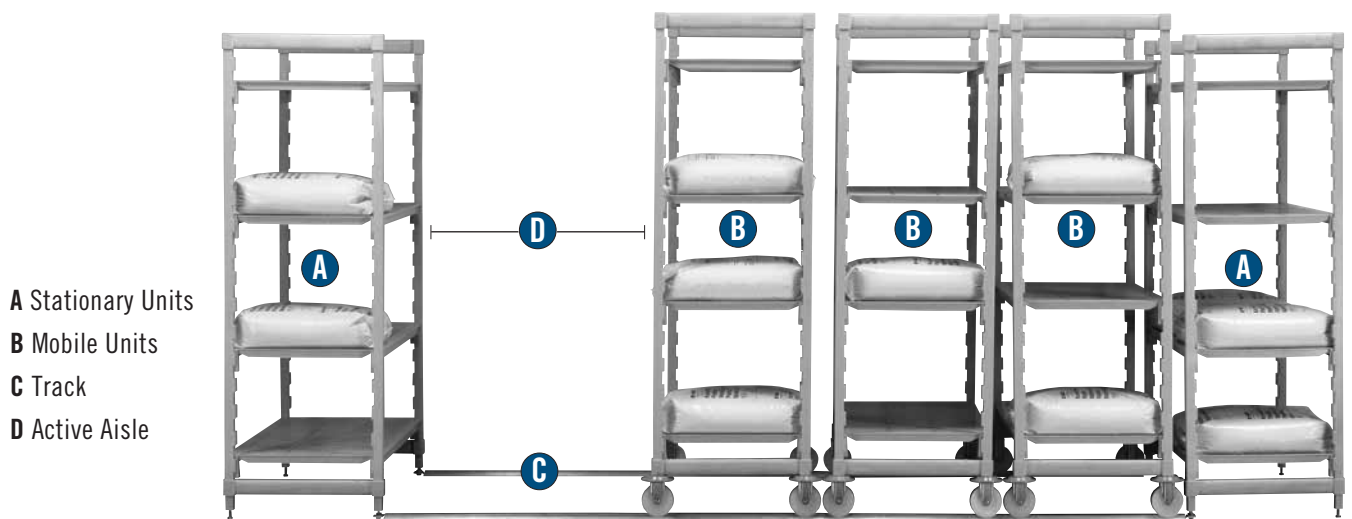

- A Stationary Units
- B Mobile Units
- C Track
- D Active Aisle

CAMGUARD

ANTIMICROBIAL SHELF PLATES
High Density Mobile Units include 4 High Density Casters.

Weight bearing capacity of High Density Mobile Camshelving Units is 340 Kg. It is recommended to use Fencing with High Density Camshelving. Refer to page 10 for product details.

All necessary hardware is included in the track kit.



CODE	DESCRIPTION	SIZE	CASE KG (CUBE M³)
Track Kits			
CSHDTK10	3,05 m Track Kit for 3 Mobile Units	3050 mm	10,64 (0,010)
CSHDTK12	3,66 m Track Kit for 4 Mobile Units	3660 mm	12,37 (0,011)
CSHDTK145	4,42 m Track Kit for 5 Mobile Units	4420 mm	14,69 (0,013)
High Density Mobile Starter Units with Vented Shelves			
MSHD46917PK	Mobile Unit 4 Vented Shelves	600 x 900 x 1790 mm	41,00 (0,238)
MSHD461017PK	Mobile Unit 4 Vented Shelves	600 x 1000 x 1790 mm	43,50 (0,238)
MSHD461117PK	Mobile Unit 4 Vented Shelves	600 x 1100 x 1790 mm	45,50 (0,238)
MSHD461217PK	Mobile Unit 4 Vented Shelves	600 x 1200 x 1790 mm	47,50 (0,316)
High Density Mobile Starter Units with Solid Shelves			
MSHD46917SP	Mobile Unit 4 Solid Shelves	600 x 900 x 1790 mm	42,00 (0,238)
MSHD461017SP	Mobile Unit 4 Solid Shelves	600 x 1000 x 1790 mm	44,50 (0,238)
MSHD461117SP	Mobile Unit 4 Solid Shelves	600 x 1100 x 1790 mm	46,50 (0,238)
MSHD461217SP	Mobile Unit 4 Solid Shelves	600 x 1200 x 1790 mm	48,50 (0,316)
Case Pack: 1 Color: Speckled White (490) Track Kits Color: (000)			
CODE	DESCRIPTION	CASE PACK	CASE KG (CUBE M³)
Accessories			
CSHDDB	High Density Donut Bumper	4	0,91 (0,001)
MSHDC	Metric High Density Caster	2	1,86 (0,005)
CSHDFF	Floor Fastener	4	0,36 (0,001)
Color: Speckled Grey (480) Track Kits Color: (000) * Track holds up to 600 mm wide mobile units.			



CAMBRO
TRUSTED FOR GENERATIONS™

Regional Distributors, Inc.

To place an order:

Contact your Regional Sales Rep directly

Call Customer Service at (585) 458-3300

Email customer-service@regdist.com

Visit www.regdist.com

© Copyright Cambro Manufacturing Company Printed in the U.S.A.

LITX14MSCENG

1002113